

Ablution Trough - PWD

A wall mounted stainless steel drinking or ablution trough with an upstand to conceal plumbing. Suited to use in schools and childcare centres.



Technical Data


| | | |
|--------------------------------|--|-----------------------|
| Product | Ablution Trough - PWD Pattern | |
| Material | Gr304 Stainless Steel | |
| Material Thickness | 1.2mm | |
| Material Surface Finish | Satin Finished | |
| Type of mounting | Wall mounted on Brackets | Product Code: 02-3530 |
| Bowl Corners | Fully Radiused | |
| External Corners | Radiused | |
| Overall length | from 900 to 2400mm | |
| Overall Width | 380mm | |
| Overall Depth | 150mm | |
| Outlet Size | DN50 (50 BSP) | |
| Outlet Position | Left or Right hand only | |
| Front and End Facias | 25mm | |
| Rear | 150 x 60mm upstand to conceal pipework | |
| Tap Holes | Available in upstand | |
| Options | 150mm upstand to either or both ends | Product Code: 02-3500 |
| | Stainless Steel Legs | Product Code: 02-3554 |

The information in this sheet reflects the current technical specifications at the time of publication. As part of our continuous improvement program, we reserve the right to change the technical or physical specifications without notice.

Ablution Trough - PWD



- Radius corners in bowl
- External Radius Corners
- Suitable for wall mounted tapware or bubblers
- 60mm thick upstands to conceal plumbing
- Suited to use in schools or childcare centres
- Custom versions can be made to suit specific applications

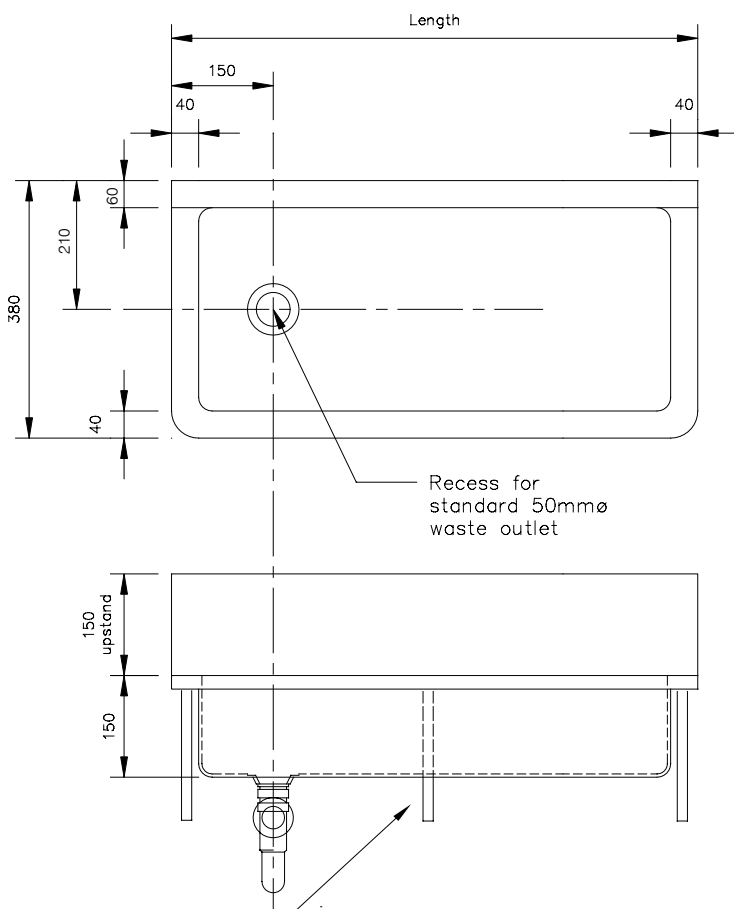

Optional wall brackets
(refer to table for number required).

| Brackets: | |
|-------------------------------------|-------------------------|
| <i>Available in Stainless Steel</i> | |
| No. of Brackets Required | Length of trough |
| 2 | <i>Upto 1600mm</i> |
| 3 | <i>1600 to 2800mm</i> |
| 4 | <i>2800 to 4000mm</i> |

| Tap Holes Set Out: | |
|----------------------------|--------------|
| <i>Recommended spacing</i> | |
| <i>Adult usage</i> | <i>600mm</i> |
| <i>Child usage</i> | <i>450mm</i> |